


REVERSIBLE, WITH AUTOMATIC FEEDING, COOLANT SYSTEM AND EQUIPPED WITH LIGHT, PARTIALLY ROTATING TABLE.

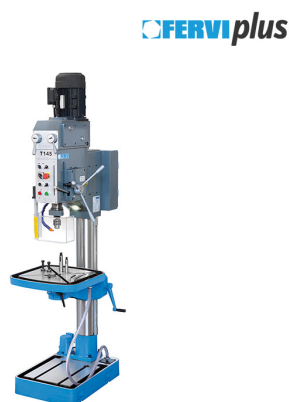

|                                                               |                          |
|---------------------------------------------------------------|--------------------------|
| Max drilling capacity on cast iron with pre-drilling hole     | Ø 45 mm                  |
| Max drilling capacity on steel with pre-drilling hole(s235jr) | Ø 40 mm                  |
| Continuous drilling capacity                                  | Ø 35 mm                  |
| Spindle taper                                                 | MT 4                     |
| Chuck sizes                                                   | 1 - 13 mm B16            |
| Spindle speed                                                 | (18) 50 - 1450 rpm       |
| Spindle travel                                                | 180 mm                   |
| Spindle rotation                                              | Dx - Sx                  |
| Quill                                                         | Ø 75 mm                  |
| Column                                                        | Ø 150 mm                 |
| Feed range                                                    | (2) 0,1 - 0,20 mm/rev    |
| Distance between spindle axis and column                      | 350 mm                   |
| Distance between spindle nose and table                       | 780 mm                   |
| Distance between spindle nose and base                        | 1320 mm                  |
| Table dimensions                                              | 560 x 560 mm             |
| Slot                                                          | 18 mm                    |
| Tilting table                                                 | ±90°                     |
| Base dimensions                                               | 500 x 730 mm             |
| Motor                                                         | 400 V 50 Hz 1,5 / 2,4 kW |
| Cooling pump                                                  | 400 V 50 Hz 40 W         |
| Dimensions                                                    | 935 x 530 x 2280 mm      |
| Net weight                                                    | 550 kg                   |
| Packaging dimensions                                          | 2275 x 1100 x 575 h mm   |

## Included

Key type drill chuck 1 - 13 mm B16  
Drill chuck arbor MT4 B16  
Reduction sleeve MT 4/3  
Reduction sleeve MT 3/2

**Gross weight**

600,00 kg

**EAN Code**

8012667340582