


3 AXIS READ OUT AND SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH AND ROTATION SPEED DISPLAY.



FERVIplus

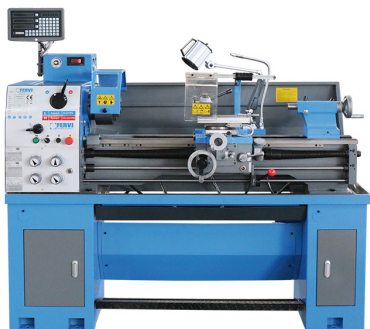

Centers height	160 mm
Max swing over the bed	320 mm
Max swing over the cross slide	198 mm
Max swing over the gap	470 mm
Tool height	20 mm
Max length of workpiece	1000 mm
Spindle bore	51 mm
Spindle taper	Camlock D1-5
Spindle bore taper MT	5
Variable spindle speed	(2) 70 - 400 350 - 2000 rpm
Longitudinal feeds	0.052 - 1.392 mm/rev
Cross feeds	0.009 - 0.253 mm/rev
Metric threads	0,4 - 7 mm
Inch threads	4 - 56 TPI
Tailstock taper MT	3
Motor	400V 50 Hz 1,5 kW
Dimensions	1820 x 900 x 1650 h mm
Net weight	635 kg
Packaging dimensions	1940x920x1640h
Gross weight	790,00 kg
EAN Code	8012667356187

Included

3+3 jaw self centering chuck Ø 200 mm
4 Reversible independent jaws chuck Ø 200 mm
Reduction sleeve MT 6/4
Face plate Ø 250 mm
Follow rest
Steady rest
Dead center MT 3
Dead center MT 4
Live center MT 3
Foot brake
Thread dial
Leadscrew hood
Chuck safeguard
Full length splash guard
T0AE quick change tool post
Working lamp
Cooling system
Turret guard
Clutch on turning bar
Quick locking tailstock carriage
Wagon gears in oil bath