


REVERSIBLE, WITH SQUARE COLUMN, DOVETAIL GUIDES AND CHUCK ROTATION RIGHT AND LEFT.

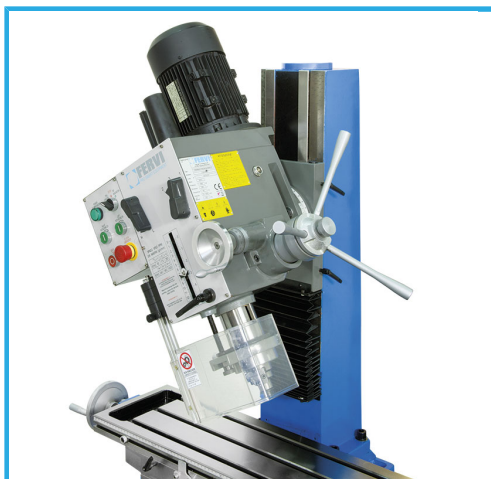

Max drilling capacity on cast iron with pre-drilling hole	Ø 40 mm
Max drilling capacity on steel with pre-drilling hole(s235jr)	Ø 45 mm
Face milling cutter max	Ø 80 mm
End milling capacity	Ø 32 mm
Tapping capacity	Ø 22 mm
Spindle taper	CM 4
Chuck sizes	1 - 13 mm B16
Spindle speed	(6) 95 - 1600 rpm
Spindle travel	120 mm
Spindle rotation	Dx - Sx
Quill	Ø 75 mm
Head tilt left and right	±60°
Manual vertical feed division	0,02 mm
Distance spindle axis - column surface	240 mm
Max distance spindle nose - table	460 mm
Table dimensions	800 x 240 mm
Slot	14 mm
Longitudinal axis	560 mm
Cross axis	190 mm
Base dimensions	630 x 405 mm
Motor	400 V 50 Hz 1,5 kW
Net weight	300 kg
Packaging dimensions	850x760x1190 h mm

Included

Drill chuck with key 1 - 16 B16
Spindle drilled MT 4 B16
Spindle taper shank MT 4 Ø 27 mm
Reduction sleeve MT 4/3
Reduction sleeve MT 3/2
Oilers
Tie rod M16
Service keys

Gross weight

320,00 kg

EAN Code

8012667226367