



TO SLIGHTLY CORRECT THE AXIALITY AND DIAMETER OF THE HOLES.
 IT CAN WORK AUTOMATICALLY AND MANUALLY.

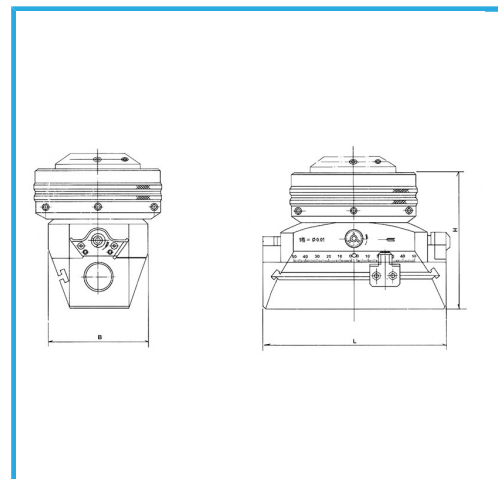

Max facing and boring $\varnothing$	450 mm
Max stroke of slide	± 50 mm
Fine feed per graduation	0,005 mm
Manual feed per revolution	3 mm
Self acting feed per revolution	0,03-0,06-0,09 0,12-0,15-0,18 mm
$\varnothing$ of tool post holes in head	22 mm
Max $\varnothing$ of head	168 mm
Height of head without shank - (H)	118 mm
Weight of head without shank	7,8 kg
Length of sliding block	160 (L) mm
Width of sliding block	90 (B) mm
Collets hole	8 - 10 - 12 - 14 $\varnothing$ mm
Accessories	1 - 2 - 3 - 4 - 5
Extension hole for tool holder	$\varnothing 10$ mm
Shank	ISO50 - DIN2080
Gross weight	19,60 kg
Packaging dimensions	410 x 310 x 140 h mm
EAN Code	8012667002930

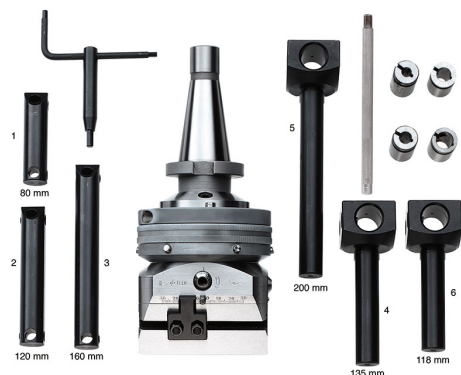

Box

40 Cr



Grounded