

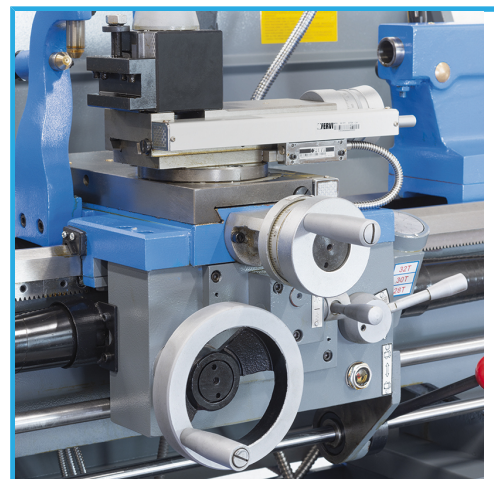


3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

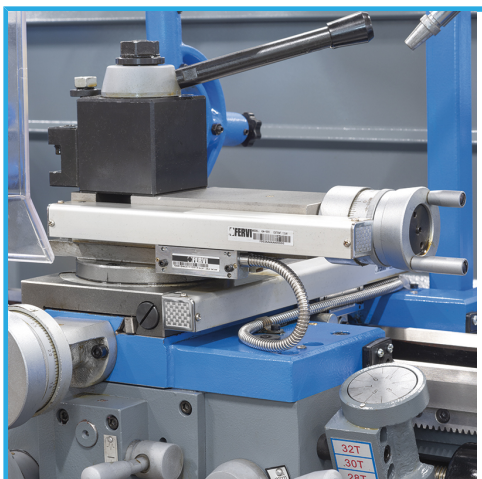

FERVIplus

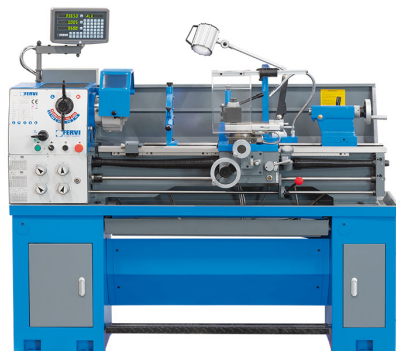

Centers height	160 mm
Max swing over the bed	320 mm
Max swing over the cross slide	198 mm
Max swing over the gap	470 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	51 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	5
Spindle speed	(8) 70 - 2000 rpm
Longitudinal feeds	0.052 - 1.392 mm/rev
Cross feeds	0.009 - 0.253 mm/rev
Metric threads	0,4 - 7 mm
Inch threads	4 - 56 TPI
Tailstock taper MT	3
Motor	230 V 50 Hz 1,8 kW
Dimensions	1820 x 800 x 1320 h mm
Net weight	630 kg
Packaging dimensions	1930 x 760 x 1600 h mm
Gross weight	630,00 kg
EAN Code	8012667276331

Included

3+3 jaw self centering chuck Ø 200 mm
4 Reversible independent jaws chuck Ø 200 mm
Reduction sleeve MT 6/4
Face plate Ø 320 mm
Follow rest
Steady rest
Dead center MT 3
Dead center MT 4
Live center MT 3
Foot brake
Thread dial
Leadscrew hood
Turret protection
Chuck safeguard
Full length splash guard
TOAE quick change tool post
Working lamp
Cooling system
Clutch on turning bar
Quick locking tailstock carriage
Wagon gears in oil bath